

PRELIMINARY

LS10 AVB SWITCH



LS10 is a plug-and-play Avnu-certified AVB switch that integrates seamlessly within the L-Acoustics ecosystem to further simplify connectivity, uniting audio and control distribution. LS10 runs out-of-the-box AVB, providing a reliable network solution that does not require IT expertise.


On its own or as an integral part of the LA-RAK II AVB, LS10 distributes audio and control via front and rear EtherCON™ connectors and SFP cages, enabling long-distance optical links. Two units mounted side-by-side on LS10-RAKSHELF, the dedicated 1U rack shelf, allow to create a seamless redundant network effortlessly. Upgrading LA-RAK II to LA-RAK II AVB is possible.

The rugged LS10 incorporates features designed to overcome the challenges of touring events but also installation applications. The quick, 5-second, startup time allows for rapid recovery in case of power loss. A configurable GPO port enables status monitoring and the auxiliary DC input offers ultimate reliability.


With LS10, lightning-quick setup of a stable distribution of your AVB signal is ensured without the need for extensive IT knowledge or experience.

SPECIFICATIONS


General	
Mains rating	100 V - 240 V AC (± 10%), 50 Hz - 60 Hz
Power consumption	10 W (normal operation) 20 W (redundancy operation)
Operating temperature	-5 °C / 23 °F to 50 °C / 122 °F
Connectors	
Network connectivity	8 Neutrik EtherCON™ (5 on Front, 3 on Rear) 2 SFP cages (Rear) compliant with SFP transceivers
Power connectivity	1 IEC inlet with lock compatible to Schurter V-Lock™ 1 redundant 24V DC power input 1 redundant 24V DC power output
User configurable GPO	1 potential free GPO on Phoenix connector
AVB	
AVB Ports	10 AVB ports at 1 Gb/s
AVB Bridge	IEEE 802.1BA-2011 standard Augmented by Avnu ProAV 1.1 requirements
Number of supported streams	150
Time to forward AVB streams after power up	5 seconds
Features	
Management	gPTP grandmaster capable RSTP
Port Sensing	Auto negotiation
Auto Crossover	MDI / MDIX (allows to use straight or cross cables)
Auto Sensing	Full or Half Duplex
Interface	Power status LED, fault status LED link up/activity status LEDs Reset to factory settings button micro USB
Physical data	
Height x Width	1.7" x 9,5" (1U x 1/2 U)
Weight	1.5 kg / 2.2 lb



Front



Rear

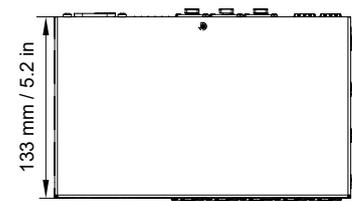

Top