


Rigging elements for stacked arrays

A-TILT

A-TILT is a site angle adjustment accessory that interfaces between KS21 and A15 Wide/Focus in a stacked array. It is used in combination with two KS21-OUTRIG* under KS21 to ensure stability.


i * Alternatively, mount the KS21 array on KS21-CHARIOT and use K2-JACK to stabilize the array. Refer to [Attaching K2-JACK stabilizers to KS21-CHARIOT](#) (p.96).

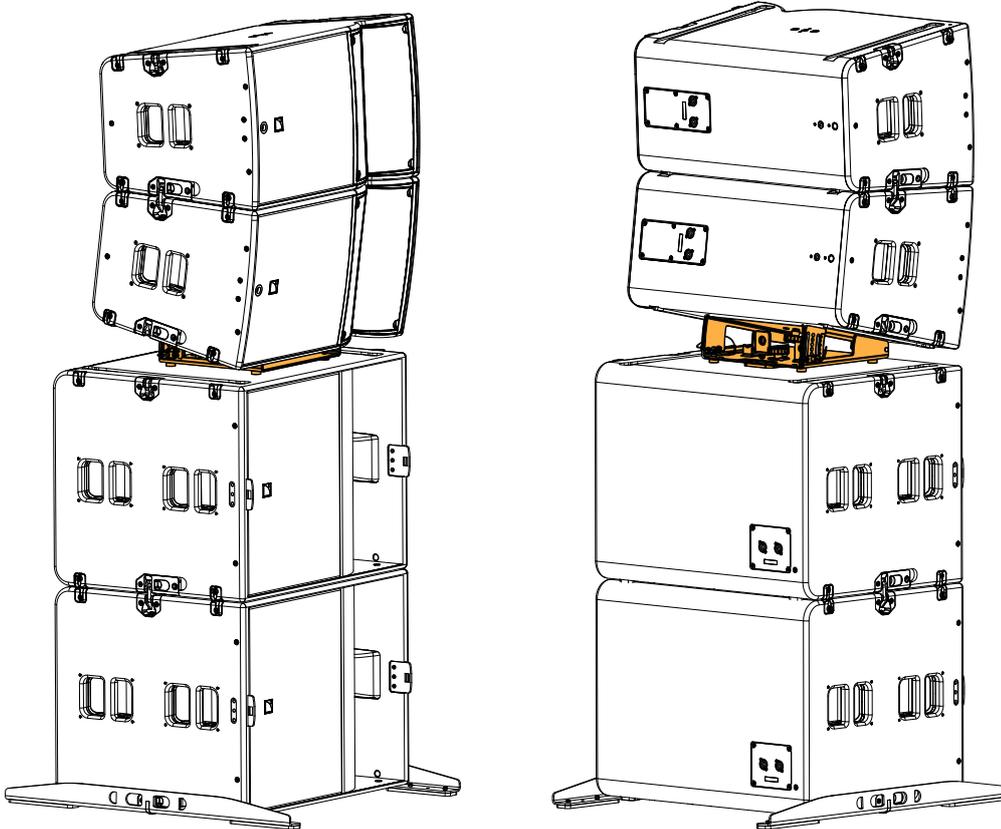

! Do not use A-TILT in a flown array.


The locating pins on A-TILT match the lodgings on the enclosure, to enable deployments with the HF section on either side. A-TILT is secured to the enclosure and to the subwoofer with threaded knobs.

! A-TILT-compatible subwoofers
The A-TILT subwoofer knob can only be used with KS21.

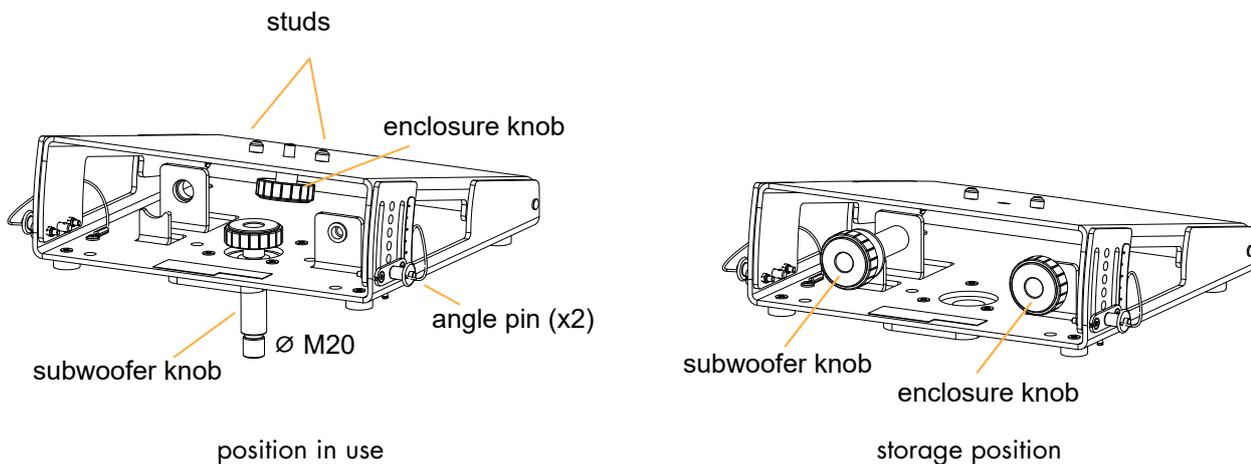

The opening angle of A-TILT can be adjusted between 12.5° and 25°.

The label displays the opening angle of the accessory and not the site angle of the enclosure. Refer to [Stacking A15 Wide/Focus on KS21 with A-TILT](#) (p.90) for the list of realized site angles.

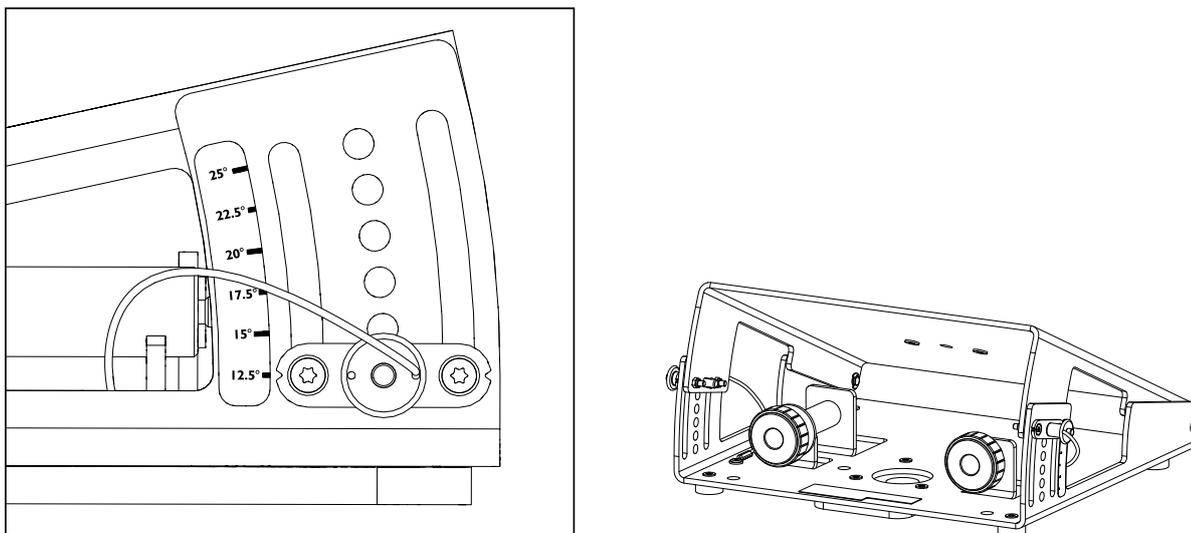

Four Ø11 mm holes are available to secure the assembly to the floor.

